

# SPECIFICATIONS

## WFA Classic Separate Tap Kit

K-T-CLASSIC

For consumers requiring a dedicated filter tap.

WaterMark approved to reduce sediment, chlorine, taste, odour and cysts.

Tested to exceed 3,500 kPa burst pressure.

Vertical or horizontal installation.

Proprietary filter head technology: **filter cartridge warranted to fit and compatible with all existing WFA PRO1500 and Everpure H54 installations.**



WaterMark

AS3497

Lic. WM-022045

IAPMO R&T OCEANA



ANSI/NSF STANDARDS  
42 AND 53



MADE IN  
USA



ASSEMBLED IN  
AUSTRALIA

WaterFilters  
AUSTRALIA

# WFA Classic Separate Tap Kit

K-T-CLASSIC

## SPECIFICATIONS

Service life/change cartridge	12 Months*
Working Pressure	10–125psi
Temperature	2–38°C
Height to allow for cartridge change	335mm
Width of filter head/cartridge	225mm
Flow Rate	0–3 lpm
Micron Rating	1 Micron
Burst pressure	exceeds 3,500 kPa as tested by CSIRO
Warranty	10 years

\*Service life will vary according to flow rate, influent line pressure and local water conditions.

## INCLUSIONS

- Mini Cistern Tap 1/2" fbsp x 1/2" mbsp
- Dual Check Valve 1/2" fbsp x 1/2" mbsp
- Pex Hose 750mm 1/2" female to 3/8" male
- WFA Filter Head with Mounting Bracket
- WFA Classic Cartridge
- Pex Hose 550mm 1/2" female to 3/8" male
- Filter Tap and connections
- Filter Monitor Alarm
- Mounting Screws
- Plumbing Tape
- Owners Manual

## CARTRIDGE RE-ORDER CODE

C-T-CLASSIC


Compatible with: all existing WFA PRO1500 and Everpure H54 installations.

## PERFORMANCE

Certified to remove/reduce:

- Sediment, dirt, rust
- Chlorine
- Bad taste and odours
- Limescale
- Cysts including Cryptosporidium and Giardia

## VERTICAL OR HORIZONTAL INSTALLATION

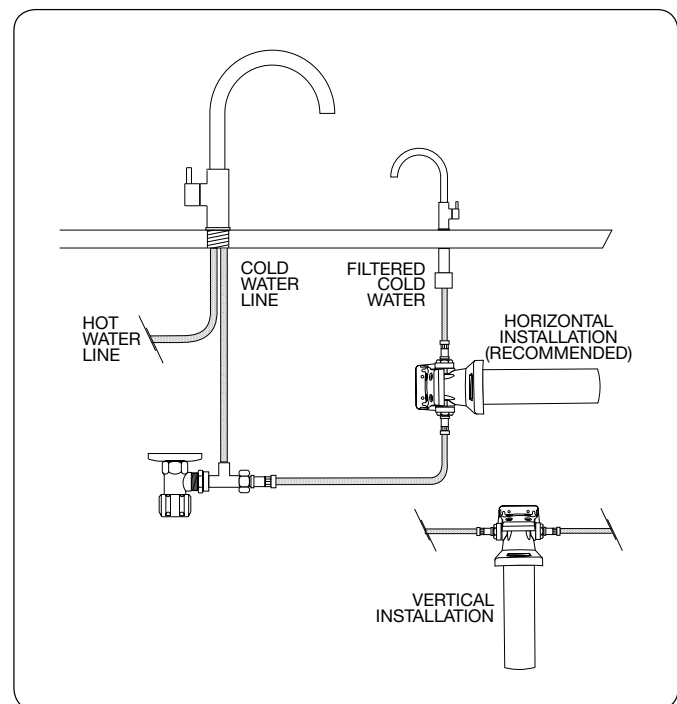

To find out more call us on 02 9905 6211  
Or if you prefer, you can email us at [sales@wfa.com.au](mailto:sales@wfa.com.au)

WaterFilters  
AUSTRALIA