

SPECIFICATIONS

WFA HiFlow Harshwater Inline Water Filter System

K-T-HWHIFLOW

Now offers improved sediment and limescale reduction and increased capacity to over 56,000 litres per annum.

Proprietary filter head technology: **filter cartridge warranted to fit and compatible with all existing HiFlow installations.**



WaterFilters
AUSTRALIA

WFA HiFlow Harshwater Inline Water Filter System

K-T-HWHIFLOW

SPECIFICATIONS

Capacity	56,700 litres
Service life/change cartridge	12 months*
Working Pressure	10–175psi (70–1200 kPa)
Temperature	2–38°C
Height to allow for cartridge change	460mm
Width of filter head/cartridge	225mm
Flow Rate	up to 8 litres per minute
Micron Rating	5 microns
Burst pressure	exceeds 3,500 kPa as tested by CSIRO
Warranty	10 years

*Service life will vary according to flow rate, influent line pressure and local water conditions.

PERFORMANCE

Certified to remove/reduce:

- Sediment
- Chlorine
- Bad taste and odours
- Limescale

INCLUSIONS


- WFA Filter Head with Mounting Bracket
- Dual Check Valve
- Pex Hose 550mm 1/2" female to 3/8" male
- Brass Hex Nipple 3/8" male to 1/2" male
- Filter Alarm
- Plumbing Tape
- HiFlow Harshwater Cartridge
- Stabilizing Bracket
- Mounting Screws
- Owners Manual

CARTRIDGE RE-ORDER CODE

C-T-HWHIFLOW

Compatible with: HF4CB5K-RC

VERTICAL OR HORIZONTAL INSTALLATION

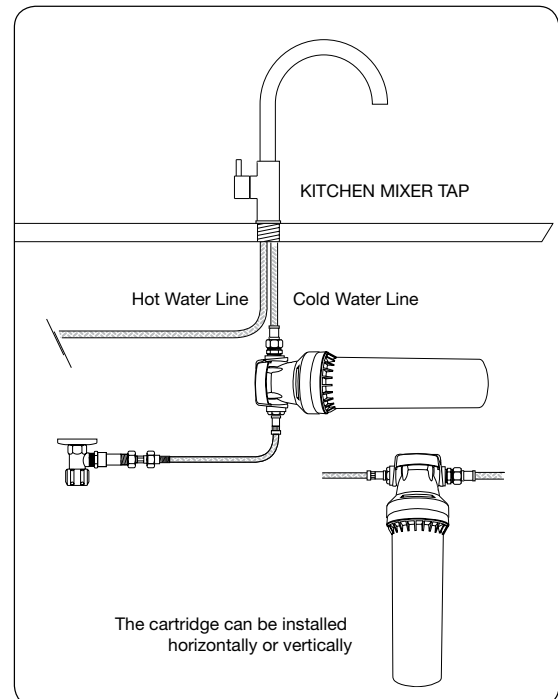

To find out more call us on 02 9905 6211
Or if you prefer, you can email us at sales@wfa.com.au

WaterFilters
AUSTRALIA