

# SPECIFICATIONS

## WFA Vanity Inline Water Filter System

K-T-VANITY

Now offers improved sediment and limescale reduction.

Proprietary filter head technology: **filter cartridge warranted to fit and compatible with all existing WFA installations.**



AS3497  
Lic. WM-022045  
IAPMO R&T OCEANA



ANSI/NSF  
STANDARD 42



MADE IN  
USA



ASSEMBLED IN  
AUSTRALIA

WaterFilters  
AUSTRALIA

# WFA Vanity Inline Water Filter System

K-T-VANITY

## SPECIFICATIONS

Service life/change cartridge	12 months*
Working Pressure	10–175psi (70–1200 kPa)
Temperature	2–38°C
Height to allow for cartridge change	335mm
Width of filter head/cartridge	225mm
Flow Rate	up to 8 litres per minute
Burst pressure	exceeds 3,500 kPa as tested by CSIRO
Warranty	10 years

\*Service life will vary according to flow rate, influent line pressure and local water conditions.

## INCLUSIONS

- WFA Filter Head with Mounting Bracket
- WFA Vanity Cartridge
- Mounting Screws
- Dual Check Valve
- Pex Hose 550mm 1/2" female to 3/8" male
- Brass Hex Nipple 3/8" male to 1/2" male
- Filter Monitor Alarm
- Plumbing Tape
- Owners Manual

## PERFORMANCE

Certified to remove/reduce:


- Sediment
- Chlorine
- Bad taste and odours
- Limescale

## CARTRIDGE RE-ORDER CODE

C-T-VANITY

To find out more call us on 02 9905 6211  
Or if you prefer, you can email us at [sales@wfa.com.au](mailto:sales@wfa.com.au)

## VERTICAL OR HORIZONTAL INSTALLATION

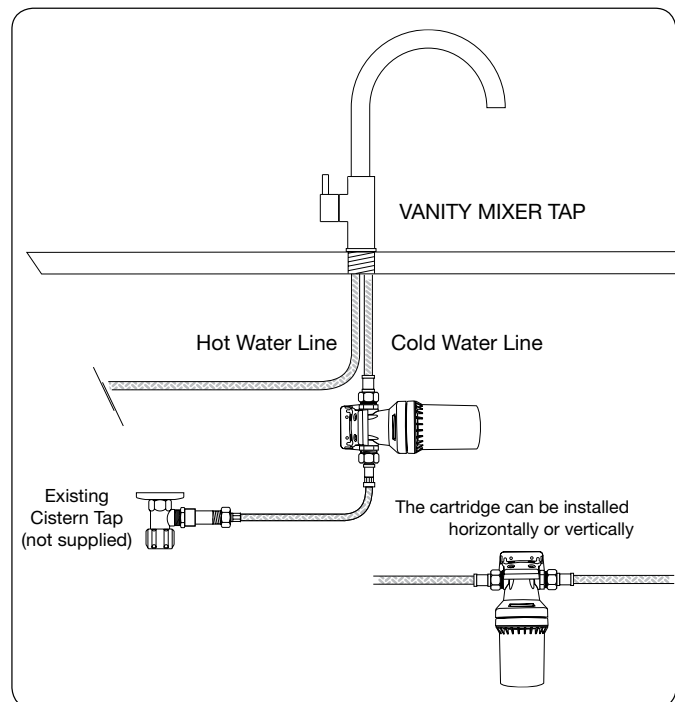

WaterFilters  
AUSTRALIA