

# SPECIFICATIONS

## WFA Vanity Inline Water Filter System

K-T-VANITY

Now offers improved sediment and limescale reduction.

Proprietary filter head technology: **filter cartridge warranted to fit and compatible with all existing WFA installations.**



AS3497  
Lic. WM-032108  
IAPMO R&T OCEANA

SYSTEM COMPLIES  
WITH NSF/ANSI  
STANDARDS 42



MADE IN  
USA



ASSEMBLED IN  
AUSTRALIA

WaterFilters  
AUSTRALIA

[hiflowwaterfilters.com.au](http://hiflowwaterfilters.com.au)

# WFA Vanity Inline Water Filter System

## K-T-VANITY

### SPECIFICATIONS

Service life/change cartridge	12 months*
Working Pressure	70-500 kPa
Temperature	2-38°C
Height to allow for cartridge change	335mm
Width of filter head/cartridge	225mm
Flow Rate	up to 8 litres per minute

\*Service life will vary according to flow rate, influent line pressure and local water conditions.

### INCLUSIONS

- WFA Filter Head with Mounting Bracket
- Dual Check Valve
- Pex Hose 650mm 1/2" female to 3/8" male\*
- Brass Hex Nipple 3/8" male to 1/2" male\*
- Filter Alarm
- Plumbing Tape
- WFA Vanity Cartridge
- Stabilizing Bracket
- Mounting Screws
- Owners Manual

\*Both parts include a sealing 'O' ring

### PERFORMANCE


Certified to remove/reduce:

- Sediment
- Chlorine
- Bad taste and odours
- Limescale

### CARTRIDGE RE-ORDER CODE

C-T-VANITY

### VERTICAL OR HORIZONTAL INSTALLATION

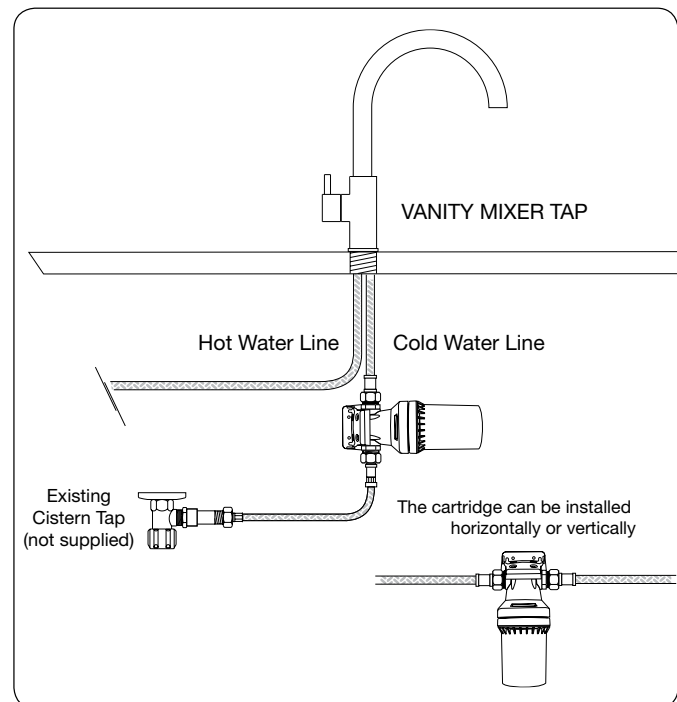

WaterFilters  
AUSTRALIA

[hiflowwaterfilters.com.au](http://hiflowwaterfilters.com.au)

To find out more call us on 02 9905 6211  
Or if you prefer, you can email us at [sales@wfa.com.au](mailto:sales@wfa.com.au)