

SPECIFICATIONS

WFA HiFlow® Inline Water Filter System

K-T-HIFLOW

Now offers improved sediment and limescale reduction and increased capacity to over 56,000 litres per annum.

Proprietary filter head technology: **filter cartridge warranted to fit and compatible with all existing HiFlow® installations.**



WaterMark
AS3497
Lic. WM-032108
IAPMO R&T OCEANA

SYSTEM COMPLIES
WITH NSF/ANSI
STANDARDS 42
AND 53



MADE IN
USA



ASSEMBLED IN
AUSTRALIA

WaterFilters
AUSTRALIA

hiflowwaterfilters.com.au

WFA HiFlow® Inline Water Filter System

K-T-HIFLOW

SPECIFICATIONS

Capacity	56,700 litres
Service life/change cartridge	12 months*
Working Pressure	70-500 kPa
Temperature	2-38°C
Height to allow for cartridge change	460mm
Width of filter head/cartridge	225mm
Flow Rate	6.3 Lpm
Micron Rating	1 micron cyst rated
Warranty	10 years

*Service life will vary according to flow rate, influent line pressure and local water conditions.

PERFORMANCE

Certified to remove/reduce:

- Sediment and rust particles
- Chlorine
- Bad taste and odours
- Limescale
- Cysts including Giardia and Cryptosporidium

INCLUSIONS

- WFA Filter Head with Mounting Bracket
- Dual Check Valve
- Pex Hose 650mm 1/2" female to 3/8" male*
- Brass Hex Nipple 3/8" male to 1/2" male*
- Filter Alarm
- Plumbing Tape
- WFA HiFlow Cartridge
- Stabilizing Bracket
- Mounting Screws
- Owners Manual


*Both parts include a sealing 'O' ring

CARTRIDGE RE-ORDER CODE

C-T-HIFLOW

Compatible with: HIFLOW-RC

VERTICAL OR HORIZONTAL INSTALLATION

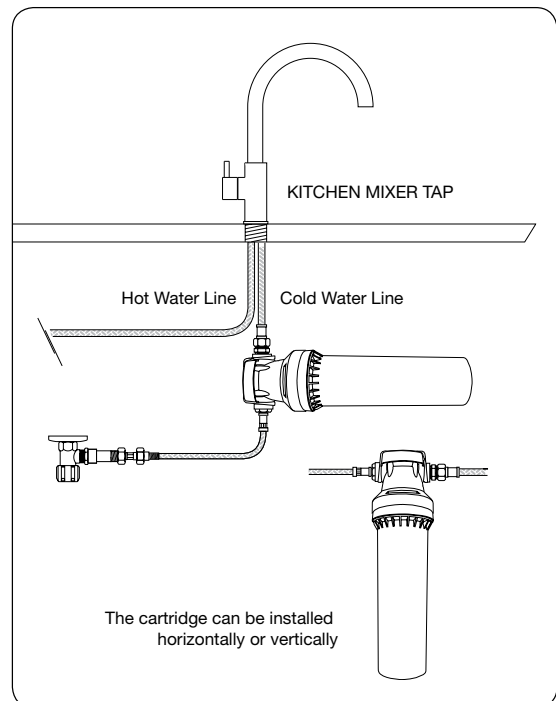

WaterFilters
AUSTRALIA

hiflowwaterfilters.com.au

To find out more call us on 02 9905 6211
Or if you prefer, you can email us at sales@wfa.com.au

HiFLOW® is a registered trademark of Water Filters Australia Pty Limited