SPECIFICATIONS

WFA HiFlow[®] Inline Water Filter System

K-T-HIFLOW





SYSTEM COMPLIES WITH NSF/ANSI STANDARDS 42 AND 53



USA

WaterFilters

hiflowwaterfilters.com.au

HiFLOW® is a registered trademark of Water Filters Australia Pty Limited

WFA HiFlow[®] Inline Water Filter System

K-T-HIFLOW

| SPECIFICATIONS | |
|--------------------------------------|---------------------|
| Capacity | 56,700 litres |
| Service life/change cartridge | 12 months* |
| Working Pressure | 70-500 kPa |
| Temperature | 2–38°C |
| Height to allow for cartridge change | 460mm |
| Width of filter head/cartridge | 225mm |
| Flow Rate | 6.3 Lpm |
| Micron Rating | 1 micron cyst rated |
| Warranty | 10 years |

PERFORMANCE

| Certified to remove/reduce | :: |
|----------------------------|----|
|----------------------------|----|

- Sediment and rust particlesChlorine
- Bad taste and odours
- Limescale
- Cysts including Giardia and Cryptosporidium
- *Service life will vary according to flow rate, influent line pressure and local water conditions.

INCLUSIONS

WFA Filter Head with Mounting Bracket
Dual Check Valve
Pex Hose 650mm ½" female to 3/8" male*
Brass Hex Nipple 3/8" male to ½" male*
Plumbing Tape
WFA HiFlow Cartridge
Stabilizing Bracket
Mounting Screws
Owners Manual

*Both parts include a sealing 'O' ring


CARTRIDGE RE-ORDER CODE

| Compatible with HIELOW DC |
|---|
| • |
| C-T-HIFLOW |
| ••••••••••••••••••••••••••••••••••••••• |

Compatible with: HIFLOW-RC

To find out more call us on 02 9905 6211 Or if you prefer, you can email us at sales@wfa.com.au

VERTICAL OR HORIZONTAL INSTALLATION

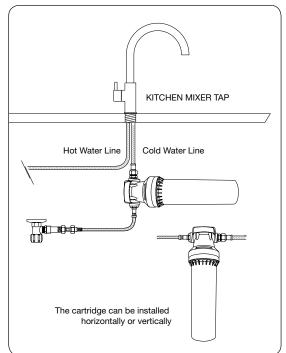

WaterFilters

hiflowwaterfilters.com.au