

Eco Traveller Regular Water Filtration System

K-C-ECOREG-LF

Latest carbon filtration technology offers improved sediment reduction.

Bacteriostatic - includes KDF media to protect against bacterial growth.

Specifications

Service Life/Change Cartridge	12 months*
Working Pressure	70 - 500 kPa
Temperature	2 - 38° C
Height (to allow for filter change)	440 mm
Width of Filter Head	225 mm
Flow Rate	0 - 3 L/min
Micron Rating	1 micron
Warranty	5 years†

*Service life will vary according to flow rate, influent line pressure and local water conditions. †Excludes filter cartridge.

Inclusions

HiFlow® Filter Head with Mounting Bracket
HiFlow® Filter Cartridge
John Guest 12mm Tee
John Guest Stem Adapter 12mm stem to 3/8" MBSP
John Guest Tube Adapter 3/8" FBSP to 3/8" tube connect
John Guest Adapters (x2) 3/8" MBSP to 3/8" tube connect
Chrome Satellite Filter Tap
John Guest Tap Adapter
John Guest Tubing 3/8" x 1.5m
Mounting Screws (2)
Plumbing Tape
Owner's Manual

For more information

Call 1300 443 569 or visit hiflowwaterfilters.com.au

Includes
Filter tap.
Filters to
1 micron.



All dimensions in mm

Performance

Certified to remove/reduce:

- Sediment, dirt and rust particles
- Chlorine
- Bad taste and odours
- Bacteriostatic - includes KDF media to protect against bacterial growth.
- Cysts including Giardia and Cryptosporidium


Cartridge Re-order Code

1 Micron Replacement Cartridge

C-C-ECOREG

Installation

Refer Owner's Manual for details.

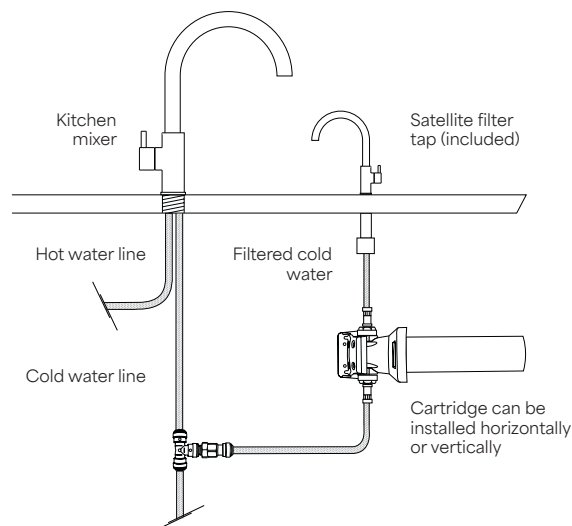

ASSEMBLED IN
THE U.S.A. FROM U.S.A.
& IMPORTED PARTS.

SYSTEM COMPLIES
WITH NSF/ANSI
STANDARDS 42 AND 53



AS 3497
Lic. WM-032108
IAPMO R&T OCEANA

Revision Date: 21/07/2026