

Classic Water Filtration System K-T-CLASSIC-LF

Dedicated satellite filter tap included.

WaterMark certified to reduce sediment, chlorine, bad taste, odour and cysts.

Vertical or horizontal installation.

Specifications

Service Life/Change Cartridge	12 months*
Working Pressure	70 - 500 kPa
Temperature	2 - 38° C
Height (to allow for filter change)	335 mm
Width of Filter Head	225 mm
Flow Rate	0 - 3 L/min
Micron Rating	1 micron nominal
Warranty	10 years†

*Service life will vary according to flow rate, influent line pressure and local water conditions. †Excludes filter cartridge.

Inclusions

HiFlow® Filter Head with Mounting Bracket
HiFlow® Filter Classic Cartridge
Chrome Satellite Filter Tap and Connections
Dual Check Valve 1/2" fbsp x 1/2" mbsp
Pex Hose 650mm 1/2" female to 3/8" male*
Mini Cistern Tap 1/2" fbsp x 1/2" mbsp
Mounting Screws
Plumbing Tape
Owner's Manual

*Both parts include a sealing O-ring

Includes
Filter Tap.
Filters to
1 micron.



All dimensions in mm

Performance

Certified to remove/reduce:

- Sediment, dirt and rust particles
- Chlorine
- Bad taste and odours
- Limescale
- Cysts including Giardia and Cryptosporidium


Cartridge Re-order Code

1 Micron Replacement Cartridge

C-T-CLASSIC

Installation

Refer Owner's Manual for details.

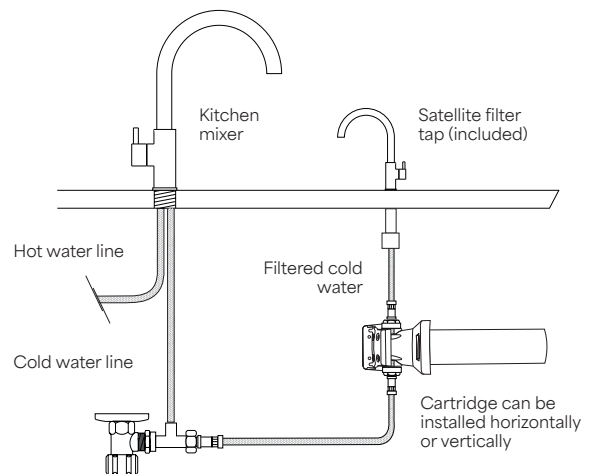

For more information

Call 1300 443 569 or visit hiflowwaterfilters.com.au



ASSEMBLED IN
THE U.S.A. FROM U.S.A.
& IMPORTED PARTS.

SYSTEM COMPLIES
WITH NSF/ANSI
STANDARDS 42 AND 53



Lead Free
AS 3497
Lic. WM-032108
IAPMO R&T OCEANA

Revision Date: 21/07/2026