

Inline Water Filtration System

K-T-HIFLOW-LF

Now offers improved sediment and limescale reduction and increased capacity to over 56,000 litres per annum.

Proprietary filter head technology: **filter cartridge warranted to fit and compatible with all existing HiFlow® installations.**

Specifications

Capacity	56,700 litres
Service Life/Change Cartridge	12 months*
Working Pressure	70 - 500 kPa
Temperature	2 - 38° C
Height (to allow for filter change)	460 mm
Width of Filter Head	225 mm
Flow Rate	6.3 L/min
Micron Rating	1 micron cyst rated
Warranty	10 years†

*Service life will vary according to flow rate, influent line pressure and local water conditions. †Excludes filter cartridge.

Inclusions

HiFlow® Filter Head with Mounting Bracket
HiFlow® Filter Cartridge
Pex Hose 650mm 1/2" female to 3/8" male*
Brass Hex Nipple 3/8" male to 1/2" male*
Dual Check Valve
Stabilising Bracket
Mounting Screws
Plumbing Tape
Owner's Manual

*Both parts include a sealing O-ring

For more information

Call 1300 443 569 or visit hiflowwaterfilters.com.au

Filters to
1 micron.
WaterMark
Certified.



All dimensions in mm

Performance

Certified to remove/reduce:

- Sediment and rust particles
- Chlorine
- Bad taste and odours
- Limescale
- Cysts including Giardia and Cryptosporidium

Cartridge Re-order Code


1 Micron Replacement Cartridge

C-T-HIFLOW

Compatible with: HIFLOW-RC

Installation

Refer Owner's Manual for details.

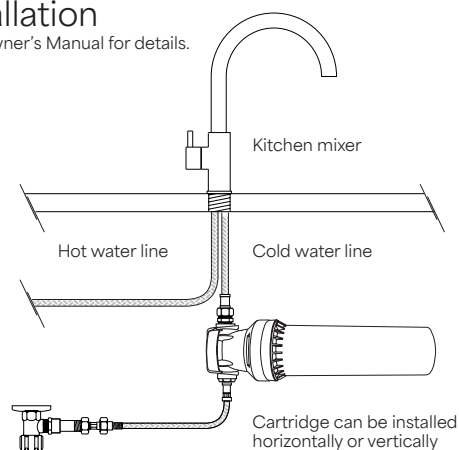

ASSEMBLED IN
THE U.S.A. FROM U.S.A.
& IMPORTED PARTS.

SYSTEM COMPLIES
WITH NSF/ANSI
STANDARDS 42 AND 53



Lead Free
AS 3497
Lic. WM-032108
IAPMO R&T OCEANA

Revision Date: 21/07/2026