

Vanity Inline Water Filtration System

K-T-VANITY-LF

New technology sediment and carbon filtration provides superior chlorine, bad taste, odour and particulate reduction. Inhibits limescale build up in water-using appliances

Filters to
5 micron.
WaterMark
Certified.



All dimensions in mm

Specifications

Service Life/Change Cartridge	12 months*
Working Pressure	70 - 500 kPa
Temperature	2 - 38° C
Height (to allow for filter change)	335 mm
Width of Filter Head	225 mm
Flow Rate	0 - 6 L/min
Micron Rating	5 micron
Warranty	10 years†

*Service life will vary according to flow rate, influent line pressure and local water conditions. †Excludes filter cartridge.

Inclusions

HiFlow® Filter Head with Mounting Bracket
HiFlow® Filter Cartridge
Dual Check Valve
Pex Hose 650mm 1/2" female to 3/8" male*
Brass Hex Nipple 3/8" male to 1/2" male*
Mounting Screws
Plumbing Tape
Owner's Manual

*Both parts include a sealing O-ring

Performance

Certified to remove/reduce:

- Sediment, dirt and rust particles
- Chlorine
- Bad taste and odours
- Limescale


Cartridge Re-order Code

5 Micron Replacement Cartridge

C-T-VANITY

Installation

Refer Owner's Manual for details.

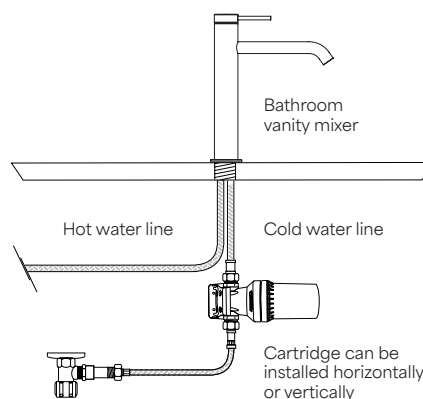

For more information

Call 1300 443 569 or visit hiflowwaterfilters.com.au